Multibeam Analog Beamformer Design for Monostatic ISAC under Self-Interference

Jordi Borras[1] and Roberto López-Valcarce[2]

[1]Universitat Politècnica de Catalunya; [2] atlanTTic Research Center, Universidade de Vigo

Summary

- This work explores multibeam (dual-functional) fully analog beamforming for joint communication and monostatic sensing under self-interference (SI).
- We provide a semi-analytic optimal solution under total power constraints and its adaptation to constant-modulus (CM) analog beamformers.

Problem Setting

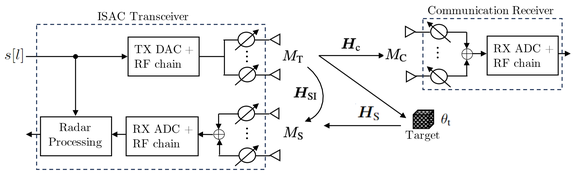

- Assume CM phased arrays: each antenna is connected to a single phase shifter with no individual gain control.
- The ISAC transceiver sends a data stream $\{s[l]\}$ of complex zero-mean, unit-variance symbols. The TX signal reads:

$$\boldsymbol{x}[l] = \boldsymbol{f} s[l] \in \mathbb{C}^{M_\mathsf{T}}$$

- The observation at the co-located radar is given by

$$r[l] = \boldsymbol{w}_\mathsf{s}^H \boldsymbol{H}_\mathsf{S} \boldsymbol{f} s[l] + \underbrace{\boldsymbol{w}_\mathsf{s}^H \boldsymbol{H}_\mathsf{SI} \boldsymbol{f} s[l]}_{\text{Post-combining SI}} + \boldsymbol{w}_\mathsf{s}^H \boldsymbol{n}_\mathsf{s}[l]$$

- Post-combining SI due to weak isolation between TX and sensing arrays and $\ell\left[\{s[l]\}\right] >$ target's echo RTT.
- SI degrades radar performance and saturates RF front-end.
- Conventional approach:

$$\min_{\boldsymbol{f}, \boldsymbol{w}_\mathsf{s}} \ \mathbb{E}\left\{ \boldsymbol{w}_\mathsf{s}^H \boldsymbol{H}_\mathsf{SI} \boldsymbol{f} s[l] \right\}$$

→ Does not protect RF components preceding $\boldsymbol{w}_\mathsf{s}$

- **Solution:** Control *pre-combining* SI

$$P_\mathsf{SI} \triangleq \mathbb{E}\{\|\boldsymbol{H}_\mathsf{SI} \boldsymbol{f} s[l]\|^2\} = \boldsymbol{f}^H \boldsymbol{H}_\mathsf{SI}^H \boldsymbol{H}_\mathsf{SI} \boldsymbol{f}$$

Objective:

$$\begin{aligned} \max_{\boldsymbol{f} \in \mathbb{C}^{M_\mathsf{T}}} \quad & G_{\mathsf{tx,comm}} \triangleq \boldsymbol{f}^H \boldsymbol{H}_\mathsf{c}^H \boldsymbol{H}_\mathsf{c} \boldsymbol{f} \\ \text{s.t.} \quad & G_{\mathsf{tx,sen}}(\theta_\mathsf{t}) \triangleq \left| \boldsymbol{f}^H \boldsymbol{a}_\mathsf{T}(\theta_\mathsf{t}) \right|^2 \geq \tau^2 \\ & P_\mathsf{SI} \leq \eta^2 \\ & |f_i| = 1, \ i \in \{1, \ldots, M_\mathsf{T}\} \end{aligned}$$

Design under Total Power Constraints

- To gain insight: relax CM constraints

$$|f_i| = 1, \ i \in \{1, \ldots, M_\mathsf{T}\} \rightarrow \|\boldsymbol{f}\|^2 = M_\mathsf{T}$$

- The design problem becomes

$$\begin{aligned} \max_{\boldsymbol{f} \in \mathbb{C}^{M_\mathsf{T}}} \quad & G_{\mathsf{tx,comm}} \\ \text{s.t.} \quad & \text{(a) } G_{\mathsf{tx,sen}}(\theta_\mathsf{t}) \geq \tau^2, \ \text{(b) } P_\mathsf{SI} \leq \eta^2, \ \text{(c) } \|\boldsymbol{f}\|^2 = M_\mathsf{T} \end{aligned}$$

→ QCQP with 3 constraints

- First order optimality condition:

$$\boldsymbol{f}_\star = \sqrt{M_\mathsf{T}} \mathcal{D}\left[\boldsymbol{H}_\mathsf{c}^H \boldsymbol{H}_\mathsf{c} + \mu_\star \boldsymbol{a}_\mathsf{T}(\theta_\mathsf{t}) \boldsymbol{a}_\mathsf{T}^H(\theta_\mathsf{t}) - \gamma_\star \boldsymbol{H}_\mathsf{SI}^H \boldsymbol{H}_\mathsf{SI} \right]$$

→ $\mathcal{D}[\boldsymbol{X}]$: dominant unit-norm eigenvector of $\boldsymbol{X}$

→ $\mu_\star$, $\gamma_\star$: optimal Lagrange multipliers for (a) and (b)

- Procedure to attempt to solve the problem:

1. If the solution obtained by relaxing constraints (a) and (b) is feasible:

$$\boldsymbol{f}_\star = \sqrt{M_\mathsf{T}} \mathcal{D}\left[\boldsymbol{H}_\mathsf{c}^H \boldsymbol{H}_\mathsf{c} \right]$$

Otherwise, proceed to Step 2.

2. Relaxing either constraint (a) or (b):

(a) Relax constraint (b) and solve

$$\begin{aligned} \boldsymbol{f}_{(a)} \quad = \quad & \arg\max_{\boldsymbol{f} \in \mathbb{C}^{M_\mathsf{T}}} \ G_{\mathsf{tx,comm}} \\ & \text{s.t. } G_{\mathsf{tx,sen}} = \tau^2, \ \|\boldsymbol{f}\|^2 = M_\mathsf{T} \end{aligned}$$

(b) Relax constraint (a) and solve

$$\begin{aligned} \boldsymbol{f}_{(b)} \quad = \quad & \arg\max_{\boldsymbol{f} \in \mathbb{C}^{M_\mathsf{T}}} \ G_{\mathsf{tx,comm}} \\ & \text{s.t. } P_\mathsf{SI} = \eta^2, \ \|\boldsymbol{f}\|^2 = M_\mathsf{T} \end{aligned}$$

(c) Let $\alpha \triangleq \boldsymbol{f}_{(a)}^H \boldsymbol{H}_\mathsf{SI}^H \boldsymbol{H}_\mathsf{SI} \boldsymbol{f}_{(a)}$ and $\beta \triangleq \boldsymbol{f}_{(b)}^H \boldsymbol{a}_\mathsf{T}(\theta_\mathsf{t}) \boldsymbol{a}_\mathsf{T}^H(\theta_\mathsf{t}) \boldsymbol{f}_{(b)}$. Then,

$$\boldsymbol{f}_\star = \begin{cases} \boldsymbol{f}_{(a)} & \text{if } \alpha \leq \eta^2 \text{ and } \beta \leq \tau^2 \\ \boldsymbol{f}_{(b)} & \text{if } \alpha \geq \eta^2 \text{ and } \beta \geq \tau^2 \\ \arg\max_{\{\boldsymbol{f}_{(a)}, \boldsymbol{f}_{(b)}\}} G_{\mathsf{tx,comm}} & \text{if } \alpha \leq \eta^2 \text{ and } \beta \geq \tau^2 \end{cases}$$

If $\alpha \geq \eta^2$ and $\beta \leq \tau^2$, proceed to Step 3.

3. The optimal $\mu_\star$ and $\gamma_\star$ must simultaneously satisfy $\boldsymbol{f}_\star^H \boldsymbol{a}_\mathsf{T}(\theta_\mathsf{t}) \boldsymbol{a}_\mathsf{T}^H(\theta_\mathsf{t}) \boldsymbol{f}_\star^H = \tau^2$ and $\boldsymbol{f}_\star^H \boldsymbol{H}_\mathsf{SI}^H \boldsymbol{H}_\mathsf{SI} \boldsymbol{f}_\star^H = \eta^2$.

→ Newton-Raphson method

Design under CM constraints

- Restoring the original CM constraints, the problem reads

$$\begin{aligned} \max_{\boldsymbol{f} \in \mathbb{C}^{M_\mathsf{T}}} \quad & G_{\mathsf{tx,comm}} \\ \text{s.t.} \quad & \text{(a) } G_{\mathsf{tx,sen}}(\theta_\mathsf{t}) \geq \tau^2, \ \text{(b) } P_\mathsf{SI} \leq \eta^2, \ \text{(c) } |f_i| = 1, \ \forall i \end{aligned}$$

- Some options to enforce CM constraints:
  - → Project TPC solution onto the set of CM vectors
  - → Replace $|f_i| = 1$ by $|f_i|^2 = 1$ and solve a QCQP with $M_\mathsf{T} + 2$ constraints via SDR
- **Proposal:** Modify the TPC procedure to enforce CM constraints at each iteration:

$$\mathcal{P}_{\mathbb{V}^n}\{\boldsymbol{x}\} = [x_1/|x_1|, \ldots, x_n/|x_n|]^T$$

→ At Step 2, find $\boldsymbol{f}_{(a)}$ and $\boldsymbol{f}_{(b)}$ with:

CM Bisection Search$(\boldsymbol{X}, \boldsymbol{Y}, \beta, \epsilon, \omega_{\min}, \omega_{\max})$

- Repeat
  1. $\omega \leftarrow (\omega_{\min} + \omega_{\max})/2$
  2. $\boldsymbol{f} \leftarrow \mathcal{P}_{\mathbb{V}^{M_\mathsf{T}}}\{\mathcal{D}\left[(1-\omega)\boldsymbol{X} + \omega \boldsymbol{Y}\right]\}$
  3. if $\boldsymbol{f}^H \boldsymbol{Y} \boldsymbol{f} > \beta$, then $\omega_{\max} \leftarrow \omega$
  4. else $\omega_{\min} \leftarrow \omega$
- Until $|\boldsymbol{f}^H \boldsymbol{Y} \boldsymbol{f} - \beta| \leq \epsilon$

→ At Step 3, find $\boldsymbol{f}_\star$ with:

CM Newton-Raphson$(\boldsymbol{X}, \boldsymbol{Y}, \boldsymbol{Z}, \beta_1, \beta_2, \epsilon, \boldsymbol{\alpha}_0)$

- $\boldsymbol{\alpha} \leftarrow \boldsymbol{\alpha}_0$
- $\boldsymbol{f} \leftarrow \mathcal{P}_{\mathbb{V}^{M_\mathsf{T}}}\{\mathcal{D}[\boldsymbol{X} + \boldsymbol{\alpha}[1]\boldsymbol{Y} - \boldsymbol{\alpha}[2]\boldsymbol{Z}]\}$
- Repeat
  1. $\boldsymbol{u} \leftarrow \mathcal{P}_{\mathbb{V}^{M_\mathsf{T}}}\{\mathcal{D}[\boldsymbol{X} + \boldsymbol{\alpha}[1]\boldsymbol{Y} - \boldsymbol{\alpha}[2]\boldsymbol{Z}]\}$
  2. Set

$$\boldsymbol{q}(\boldsymbol{\alpha}) \leftarrow \begin{bmatrix} \boldsymbol{u}^H \boldsymbol{Y} \boldsymbol{u} - \beta_1 \\ \boldsymbol{u}^H \boldsymbol{Z} \boldsymbol{u} - \beta_2 \end{bmatrix}.$$

  3. Compute the Jacobian matrix

$$\boldsymbol{J}_{\boldsymbol{q}}(\boldsymbol{\alpha}) \leftarrow \begin{bmatrix} \frac{\partial}{\partial \boldsymbol{\alpha}[1]} q_1(\boldsymbol{\alpha}) & \frac{\partial}{\partial \boldsymbol{\alpha}[2]} q_1(\boldsymbol{\alpha}) \\ \frac{\partial}{\partial \boldsymbol{\alpha}[1]} q_2(\boldsymbol{\alpha}) & \frac{\partial}{\partial \boldsymbol{\alpha}[2]} q_2(\boldsymbol{\alpha}) \end{bmatrix}$$

  4. Update $\boldsymbol{\alpha} \leftarrow \boldsymbol{\alpha} - \boldsymbol{J}_{\boldsymbol{q}}^{-1}(\boldsymbol{\alpha}) \boldsymbol{q}(\boldsymbol{\alpha})$
  5. $\boldsymbol{f} \leftarrow \mathcal{P}_{\mathbb{V}^{M_\mathsf{T}}}\{\mathcal{D}[\boldsymbol{X} + \boldsymbol{\alpha}[1]\boldsymbol{Y} - \boldsymbol{\alpha}[2]\boldsymbol{Z}]\}$
- Until $|\boldsymbol{f}^H \boldsymbol{Y} \boldsymbol{f} - \beta_1| \leq \epsilon$ & $|\boldsymbol{f}^H \boldsymbol{Z} \boldsymbol{f} - \beta_2| \leq \epsilon$

Numerical Example

- Proposed with CM (blue)
- Communication-Sensing Upperbound: neglect SI (black)
- Benchmarks:
  - → SDR with CM (dashed red)
  - → Convex Combination with CM (magenta)
  - → Proposed with TPC + Final Projection (orange)
  - → SDR with TPC + Final Projection (green)

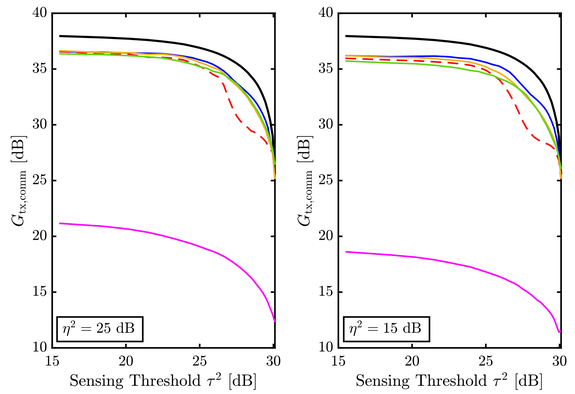

- SDR with CM
  - → Unable to find rank-1 solutions in 40% of the trials
- Proposed with TPC + Final Projection
  - → Prob. exceeding SI limit: 20% (left) and 49% (right)
- SDR with TPC + Final Projection
  - → Almost surely violates SI constraint

References & Acknowledgements

[1] J. Borras and R. López-Valcarce, "Multibeam analog beamformer design for monostatic isac under self-interference," in *2026 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2026.

Work funded by MCIN/AEI/10.13039/501100011033/ FEDER "A way of making Europe" under project MAYTE (PID2022-136512OB-C21/C22):